

# POWER RELAY

## 1 POLE - 8A MEDIUM LOAD CONTROL

### JS Series

RoHS Compliant

#### FEATURES



- UL class B (130°C) coil wire insulation
- 1 Form A (SPST-NO) or 1 Form C (SPDT) contact
- Low profile and space saving
- Height: 12.5mm - Mounting space: 290mm<sup>2</sup>
- High sensitivity in small package  
Operating power 110 to 140mW, nominal power 220 to 290mW
- High insulation in small package  
Insulation distance: 8.0mm (between coil and contacts)  
Dielectric strength: 5,000VAC  
Surge strength: 10,000V
- Plastic materials: UL 94 flame class V-0 UL CTI level class 2
- Plastic sealed
- Various contact material options
- RoHS compliant



#### APPLICATIONS

I/O modules, timer, heater control, air conditioner etc.

#### PART NUMBERS

[Example] JS - 12 M N - K T - V3  
 (a) (b) (c) (d) (e) (f) (g)

(a)	Relay type	JS series
(b)	Coil voltage	12 : 5...60VDC Please refer to coil rating table
(c)	Coil configuration	Nil : 1c (1 Form C, SPDT) M : 1a (1 Form A, SPST-NO)
(d)	Contact material	N : Gold flash silver tin oxide F : Gold flash silver nickel D : Silver nickel
(e)	Enclosure	K : Plastic sealed type
(f)	Construction	Nil : 3.2mm T : 5.0mm (only JS-MN)
(g)	Gold plating	Nil : Standard V3 : 3.0µm gold plating for lower current applications (available with N contact, not available for T, 5.0mm type) V1 : 1.0µm gold plating for lower current applications (available with N contact, not available for T, 5.0mm type)

Note: Actual marking omits the hyphen (-). V3, V1 are marked at different position on the relay. E.g.: Ordering code: JS-12F actual marking: JS12F-K

## ■ SPECIFICATIONS

Item		Specifications				Remarks/Conditions
		JS-( )F/N-K	JS-( )D-K	JS-( )N-K-V1	JS-( )N-K-V3	
Contact Data	Configuration	1a (1 Form A, SPST-NO), 1c (1 Form C, SPDT)				
	Construction	Single				
	Plating	Au flash	-	1μm Au plate	3μm Au plate	
	Material	See part number information				
	Resistance	Max. 100mΩ		Max. 30mΩ		At 1A, 6VDC
	Contact rating	8A, 250VAC/24VDC				Resistive
	Max. carrying current	10A				
	Max. switching voltage	400VAC/300VDC				
	Max. switching power	2,000VA/192W				
	Min. switching load <sup>*1</sup>	100mA, 5VDC		10mA, 5VDC		
Coil	Rated power (20°C)	220 to 290mW				
	Operate power (20°C)	110 to 140mW				
	Operating temperature range	-40°C ~ +85°C (at rated voltage)				No frost
Time	Operate	Max. 10ms				Without bounce
	Release	Max. 5ms				Without bounce, no diode
Life	Mechanical	Min. 20 x 10 <sup>6</sup> operations				
	Electrical (resistive)	AC contact rating	Min. 50 x 10 <sup>3</sup> operations (AgSnO <sub>2</sub> ) Min. 20 x 10 <sup>3</sup> operations (AgNi)			At rated load
		DC contact rating	Min. 50 x 10 <sup>3</sup> operations (AgSnO <sub>2</sub> ) Min. 20 x 10 <sup>3</sup> operations (AgNi)			At rated load
Insulation	Insulation resistance	Min. 1,000MΩ				At 500VDC
	Dielectric strength	Open contacts	1,000VAC(50/60Hz), 1 minute			
		Coil to contacts	5,000VAC (50/60Hz), 1 minute			
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave			
	Clearance	8mm				
	Creepage	8mm				
	EN61810-1, VDE0435	Voltage	250V			
Pollution		3				
Material group		IIIa				
Category		C / 250V (reference voltage) (VDE 01106)				
Others	Vibration resistance	Misoperation	10 to 55 to 10Hz single amplitude 0.825mm			Coil ON/OFF, 3 axis, total 6 cycles
		Endurance	10 to 55 to 10Hz single amplitude 1.65mm			Coil OFF, 3 axis, total 6 hours
	Shock resistance	Misoperation	Min. 100m/s <sup>2</sup> (11±1ms)			Coil ON/OFF, 3 axis, total 36 operations
		Endurance	Min. 1,000m/s <sup>2</sup> (6±1ms)			Coil OFF, 3 axis, total 18 operations
	Dimensions / Weight	10.0 x 29.0 x 12.5 mm / approx. 8.0g				
	Sealing	Plastic sealed				

\*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL DATA

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ( $\Omega$ ) $\pm$ 10%	Must Operate Voltage* <sup>1</sup> (VDC)	Must Release Voltage* <sup>1</sup> (VDC)	Rated Power (mW)
5	5	112	3.5	0.5	225
6	6	160	4.2	0.6	225
9	9	360	6.3	0.9	225
12	12	660	8.5	1.2	220
18	18	1,455	12.7	1.8	225
24	24	2,350	16.8	2.4	245
48	48	8,000	33.4	4.8	290
60	60	12,500	41.7	6.0	290

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

\*: Specified operate values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

Note: Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.


## ■ SAFETY STANDARDS

Type	Compliance	Contact Rating	
		Contact Material: N	Contact Material: D, F
UL	UL508 File No. E56140	8A, 250VAC (resistive) 100k 8A, 24VDC (resistive) 100k	
CSA	C22.2 No.14 File No. LR40304	10A, 250VAC (resistive) 10A, 30VDC (resistive) 1/4hp, 125VAC/250VAC 1/3hp, 125VAC 1/2hp, 250VAC Pilot duty: A300, B300, C150, R300	8A, 250VAC (resistive) 8A, 24VDC (resistive)
VDE	IEC/EN 61810-1 EN60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730-1 clause 12.2; 13.2; 20.1; 20.2; 20.3 EN60947-5-1 Appendix C	8A, 250VAC $\cos\phi=1$ 8A, 24VDC L/R=0ms	<JS-( )D-K, JS-( )F-K> 6A, 250VAC $\cos\phi=1$ 8A, 24VDC L/R=0ms <JS-( )MD-K(T), JS-( )MF-K(T)> 8A, 250VAC $\cos\phi=1$ 8A, 24VDC L/R=0ms
CQC	GB15092.1 File No. 17001162883	10A, 250VAC/30VDC	


\* -V1 and -V3 are not covered by the safety standards.

## ■ DIMENSIONS


### JS-M (1a)

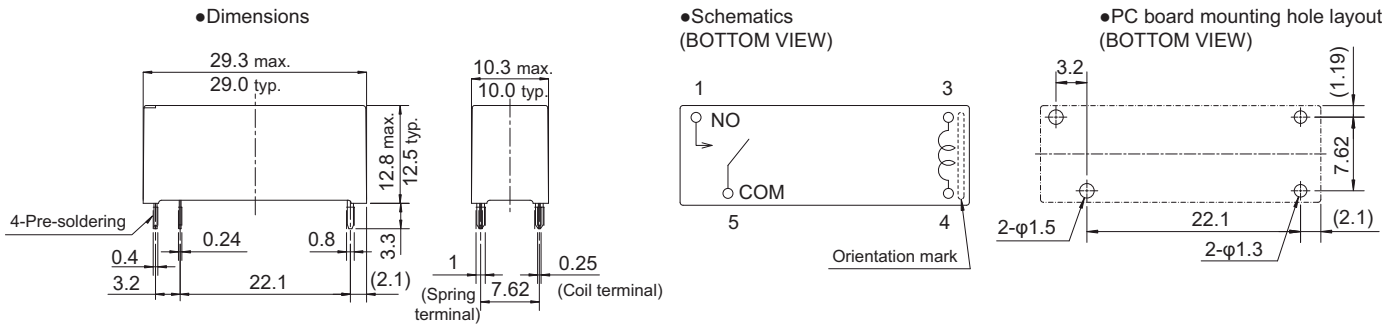

### JS (1c)

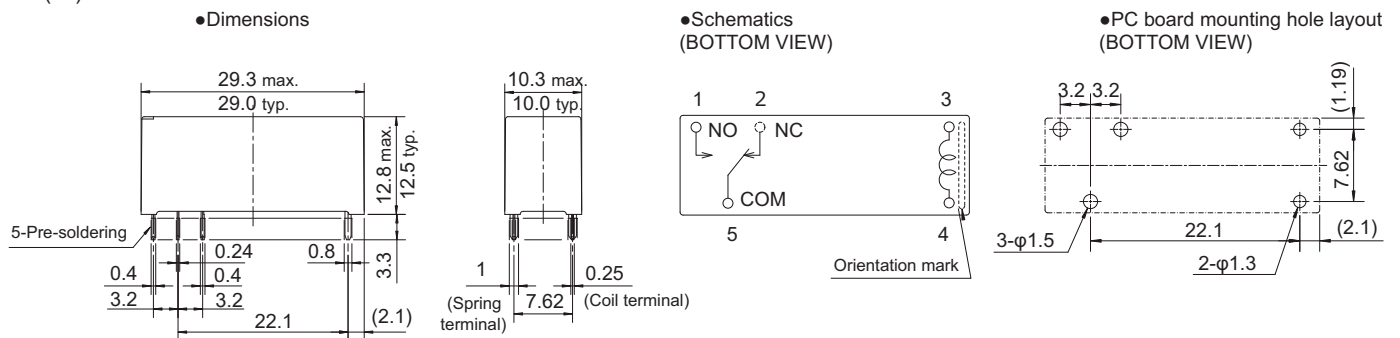

### JS-MN-T (1a, 5.0mm terminal pitch)

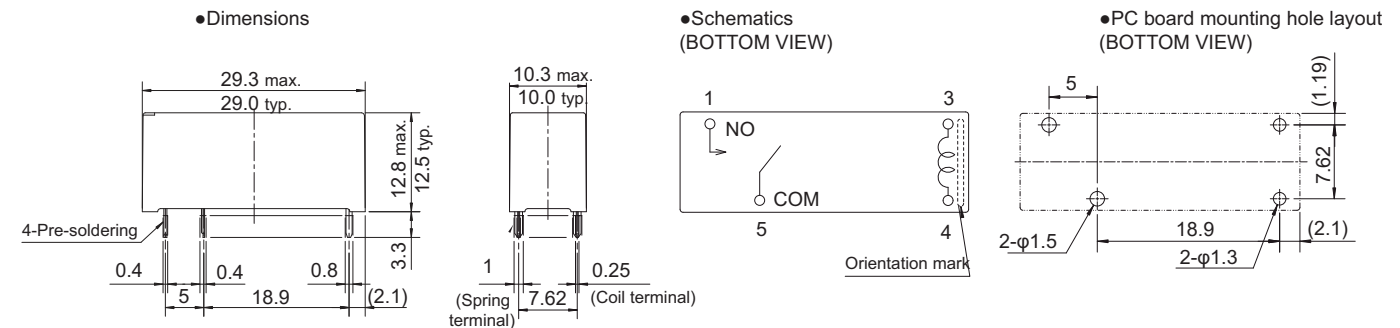

- Dimensions of the terminals do not include thickness of pre-soldering.
- Tolerance of PC board mounting hole layout:  $\pm 0.1$  unless otherwise specified.










( ): Reference value  
Unit: mm

## ■ PART NUMBER LIST

Part Number	Contact Configuration	Contact Material	Construction	Enclosure	Others
JS-( )N-K	1c (1 Form C)	Gold flash silver tin oxide	3.2mm	Plastic sealed	-
JS-( )N-K-V1					1μm gold plating
JS-( )N-K-V3					3μm gold plating
JS-( )F-K		Gold flash silver nickel			-
JS-( )D-K		Silver nickel			-
JS-( )MN-K	1a (1 Form A)	Gold flash silver tin oxide	3.2mm	Plastic sealed	-
JS-( )MN-K-V1			5.0mm		1μm gold plating
JS-( )MN-K-V3					3μm gold plating
JS-( )MN-KT		3.2mm	Gold flash silver nickel		-
JS-( )MF-K			Silver nickel		-
JS-( )MD-K			-		

## CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

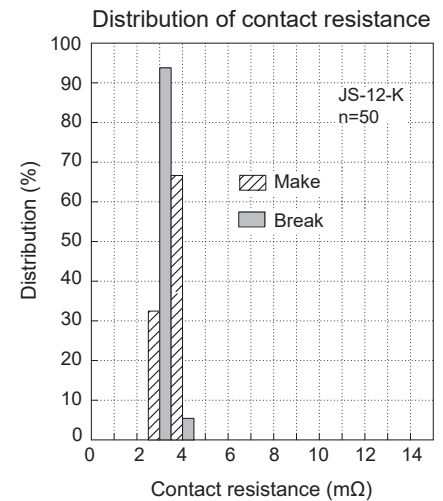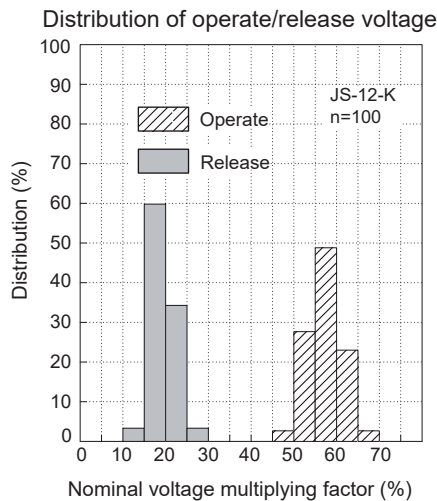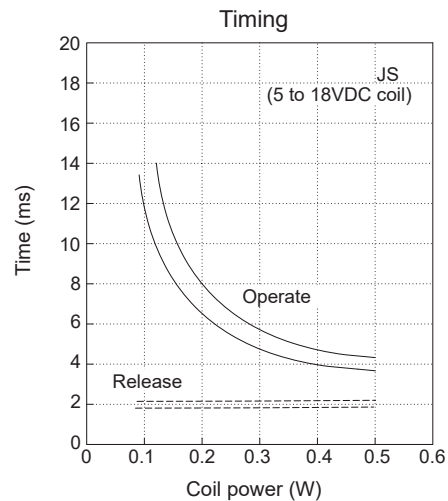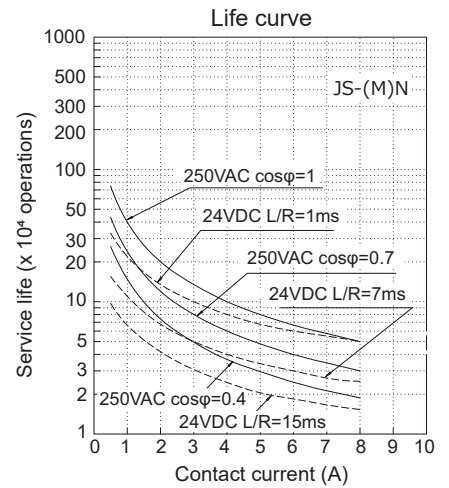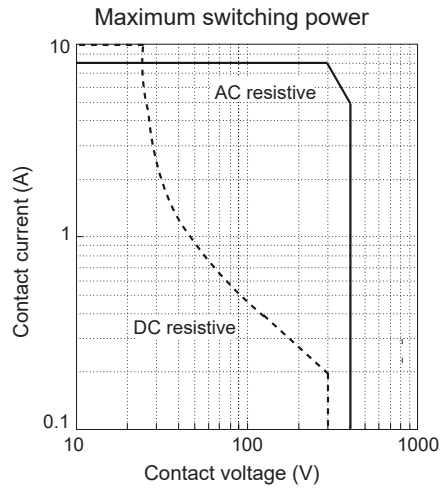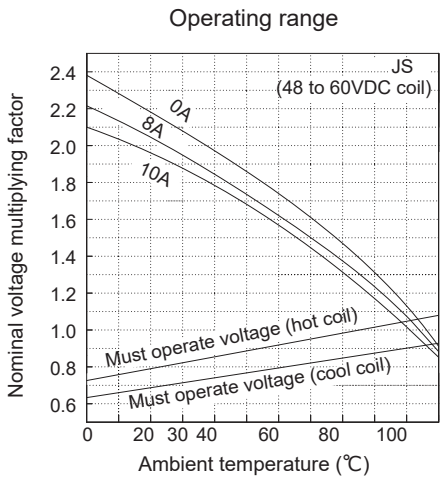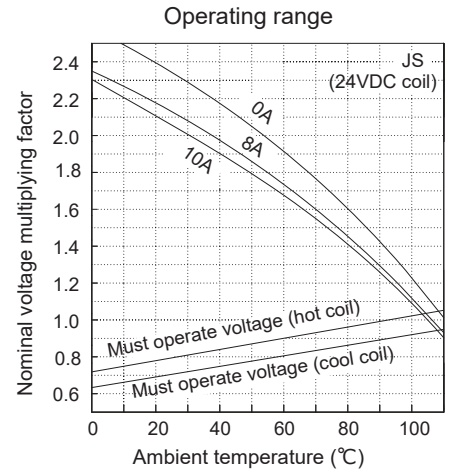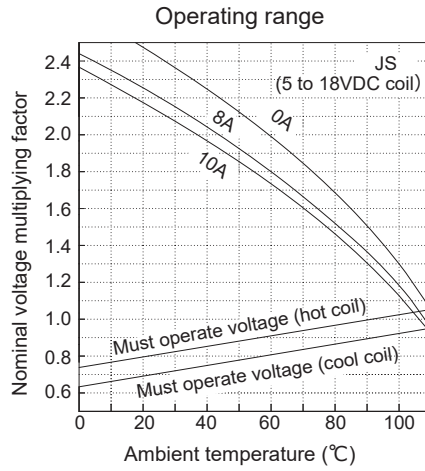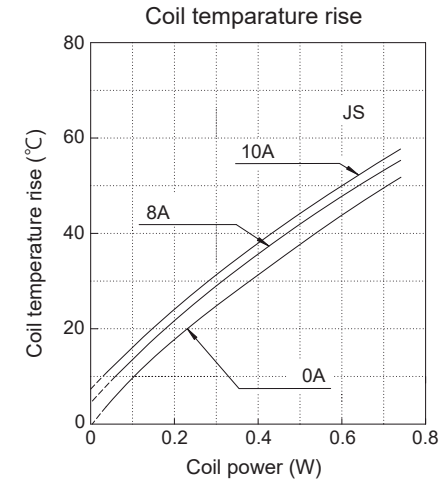

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## GENERAL INFORMATION

### 1. ROHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.

Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

#### Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: Maximum 340-360°C

Duration: Maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: fcl-contact@cs.fcl-components.com

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: contact@fcl-components.us

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: info@fcl-components.eu

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65-6375-8560  
Email: fcal@fcl-components.com

### China

FCL COMPONENTS (SHANGHAI) CO.,LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai  
200070, China  
Tel: +86-21-3253 0998  
Email: fcsh@fcl-components.com

### Hong Kong

FCL COMPONENTS HONG KONG CO.,  
LIMITED  
Unit 2313, Seapower Tower, Concordia  
Plaza, No.1 Science Museum Road,  
TST, Kowloon, Hong Kong  
Tel: +852-2881-8495  
Email: fcal@fcl-components.com

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

---

© 2025 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. February 5, 2025.