


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0782131011](#)  
**Status:** **Active**  
**Overview:** [Impact Backplane Connector and Cable Assembly System](#)  
**Description:** Impact 4 Pair, Right-Angle Power Header, Press-Fit, Blade A1 & A2, B1 & B2 Length 6.90mm, LCP, Glass Filled UL94-V0, Black, Tray Packaging, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-76060-9997-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-78213-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Symbol Footprint Data SYM-78213-1011-001 (PDF)</a>
<a href="#">Product Specification PS-78213-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

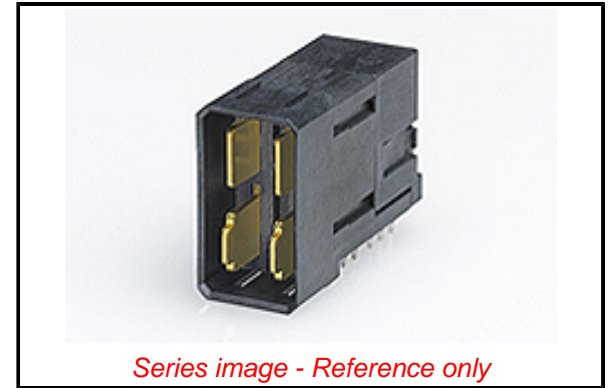

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	Backplane Connectors
Series	<a href="#">78213</a>
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799-001
Component Type	Power Header
Overview	<a href="#">Impact Backplane Connector and Cable Assembly System</a>
Product Name	Impact
UPC	883906264918

**Physical**

Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	8.760/g
Number of Columns	N/A
Number of Pairs	4
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.00mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[78213 Series](#)

**Mates With**

[78214 Impact Vertical Receptacle](#), [78350 Right Angle Receptacle](#)

Temperature Range - Operating -55° to +85°C  
Termination Interface: Style Through Hole - Compliant Pin

**Electrical**

Current - Maximum per Contact 20.0A  
Data Rate N/A  
Shield Type N/A  
Shielded No  
Voltage - Maximum 250V

**Solder Process Data**

Lead-free Process Capability N/A

**Material Info**

**Reference - Drawing Numbers**

Application Specification AS-76060-9997-001  
Packaging Specification PK-78213-001-001  
Product Specification PS-78213-001-001  
Sales Drawing SD-78213-003-001  
Symbol/Footprint Data SYM-78213-1011-001

This document was generated on 01/03/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[78213-1011](#)