


Product availability: Non-Stock - Not normally stocked in distribution facility

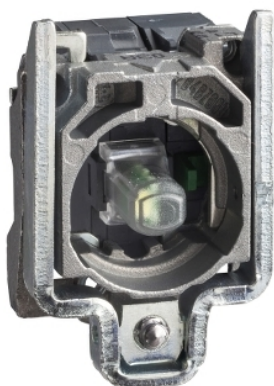

## Main

|                               |  |
|-------------------------------|--|
| Range of product              | Harmony XB4                                    |
| Product or component type     | Complete body/contact assembly and light block |
| Device short name             | ZB4  |
| Fixing collar material        | Zamak  |
| Sale per indivisible quantity | 1  |
| Head type                     | Standard                                       |
| Contacts type and composition | 1 NO + 1 NC                                    |
| Contact operation             | Slow-break                                     |
| Connections - terminals       | Plug-in connector                              |
| Light source                  | Protected LED                                  |
| Bulb base                     | Integral LED                                   |
| Light block supply            | Direct   |
| Light source colour           | White  |
| [Us] rated supply voltage     | 24 V AC/DC, 50/60 Hz                           |

## Complementary

|   |   |
|---|---|
| CAD overall width                           | 1.18 in (30 mm)   |
| CAD overall height                          | 1.85 in (47 mm)   |
| Terminals description ISO n°1               | (11-12)NC   |
| Contacts usage                              | Standard  |
| Positive opening                            | With positive opening conforming to EN/IEC 60947-5-1 appendix K   |
| Operating travel                            | 0.06 in (1.5 mm) (NC changing electrical state)<br>0.1 in (2.6 mm) (NO changing electrical state)<br>0.17 in (4.3 mm) (total travel)  |
| Operating force                             | 2 N (NC changing electrical state)<br>2.3 N (NO changing electrical state)  |
| Operating torque                            | 0.44 lbf.in (0.05 N.m) (NO changing electrical state)   |
| Mechanical durability                       | 5000000 cycles  |
| Contacts material                           | Silver alloy (Ag/Ni)  |
| Short-circuit protection                    | 4 A cartridge fuse type gG conforming to EN/IEC 60947-5-1   |
| [Ith] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1   |
| [Ui] rated insulation voltage               | 250 V (degree of pollution: 3) conforming to EN/IEC 60947-1   |
| [Uimp] rated impulse withstand voltage      | 4 kV conforming to EN 60947-1   |
| [Ie] rated operational current              | 3 A at 240 V, AC-15, A300 conforming to EN/IEC 60947-5-1<br>6 A at 120 V, AC-15, A300 conforming to EN/IEC 60947-5-1<br>0.1 A at 250 V, DC-13, R300 conforming to EN/IEC 60947-5-1<br>0.22 A at 125 V, DC-13, R300 conforming to EN/IEC 60947-5-1   |
| Electrical durability                       | 1000000 cycles, AC-15, 1 A at 230 V, operating rate: <= 3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 1.5 A at 120 V, operating rate: <= 3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 3 A at 24 V, operating rate: <= 3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.15 A at 110 V, operating rate: <= 3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.4 A at 24 V, operating rate: <= 3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                        |   |
|------------------------|---|
| Electrical reliability | $\Lambda < 10\text{exp}(-6)$ at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4<br>$\Lambda < 10\text{exp}(-8)$ at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4 |
| Signalling type        | Steady  |
| Supply voltage limits  | 19.2...30 V DC<br>21.6...26.4 V AC  |
| Current consumption    | 18 mA   |
| Service life           | 100000 h at rated voltage and 25 °C   |
| Surge withstand        | 1 kV conforming to IEC 61000-4-5  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TH   |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)   |
| Ambient air temperature for operation | -40...158 °F (-40...70 °C)   |
| Electrical shock protection class     | Class I conforming to IEC 60536  |
| Standards                             | UL 508<br>CSA C22.2 No 14<br>EN/IEC 60947-5-4<br>EN/IEC 60947-5-5<br>EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>JIS C 4520  |
| Product certifications                | DNV<br>RINA<br>CSA<br>LROS (Lloyds register of shipping)<br>UL listed<br>BV<br>GL  |
| Vibration resistance                  | 5 gn (f = 2...500 Hz) conforming to IEC 60068-2-6  |
| Shock resistance                      | 30 gn (duration = 18 ms) half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) half sine wave acceleration conforming to IEC 60068-2-27 |
| Resistance to fast transients         | 2 kV conforming to IEC 61000-4-4   |
| Resistance to electromagnetic fields  | 9.14 V/yd (10 V/m) conforming to IEC 61000-4-3   |
| Resistance to electrostatic discharge | 6 kV on contact (on metal parts) conforming to IEC 61000-2-6<br>8 kV in free air (in insulating parts) conforming to IEC 61000-2-6                                     |
| Electromagnetic emission              | Class B conforming to IEC 55011  |

## Ordering and shipping details

|                       |   |
|-----------------------|---|
| Category              | 22469 - PUSHBUTTON,22MM ACCESSORIES-NEW |
| Discount Schedule     | CS2                                     |
| GTIN                  | 003389110894011                         |
| Nbr. of units in pkg. | 1                                       |
| Package weight(Lbs)   | 0.14999999999999999                     |
| Returnability         | N                                       |
| Country of origin     | FR                                      |


## Offer Sustainability

|                           |  |
|---------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including:   |
| ----- Substance 1         | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| ----- More information    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |



## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions



Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board   | Connection by Faston Connectors   |
|---|---|
|    |  |
| <p>(1) Diameter on finished panel or support<br/>           (2) 40 mm min. / 1.57 in. min.<br/>           (3) 30 mm min. / 1.18 in. min.<br/>           (4) <math>\varnothing 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\varnothing 22.3 \text{ mm }_0^{+0.4} / 0.88 \text{ in. }_0^{+0.016})</math><br/>           (5) 45 mm min. / 1.78 in. min.<br/>           (6) 32 mm min. / 1.26 in. min.</p> |   |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[ZB4BW0B154](#)