






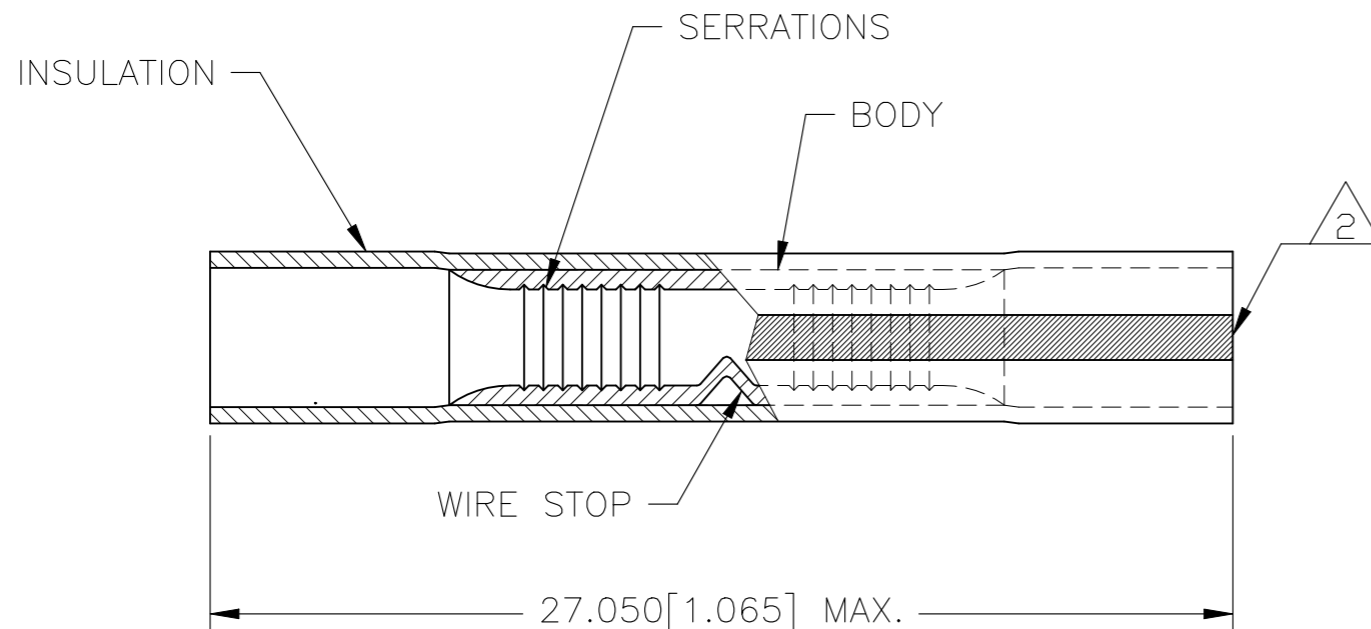


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REV/ 0720-0612-95	31MAY95	-	ME
	C1	REVISED PER ECO-17-014338	29MAR2018	RS	DR
	C2	REVISED PER ECO-20-017411	10DEC2020	RK	DR

 E13288 Listed
16-14 AWG SOLID OR STRANDED



- 1. WIRE INSUL DIA, 2.921-4.318 [.115-.170]
-  INSULATION STRIPES: 2 - 180 DEGREES APART.
-  MATERIAL: BODY - COPPER PER ASTM B152
INSULATION - PVC
-  FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN
EXT THK PER ASTM B545
INSULATION COLOR - TRANSPARENT BLUE
INSULATION STRIPE COLOR - BLUE

2500	ON TAPE, REEL	55785-2
1000	LOOSE PIECE	55785-1
QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 4/12/90	 TE Connectivity				
	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK MS FEHER 4/16/90					
	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APVD TL SHUTTER 4/17/90	NAME SPLICE, BUTT, PLASTI-GRIP, WIRE SIZE, 16-14 AWG			
	CIRVULAR MIL AREA: 1.04-2.62mm²[2.050-5.180] SOLID OR STRANDED	MATERIAL 	FINISH 	PRODUCT SPEC UL 486A-B	APPLICATION SPEC 114-2161	SIZE A3	CAGE CODE 00779	DRAWING NO C-55785
CUSTOMER DRAWING			WEIGHT -	SCALE 5:1	SHEET 1 OF 1	REV C2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55785-2](#)