

FEATURES

- Ø 1.60 mm active area
- Low dark current
- Long term stability
- High shunt resistance

DESCRIPTION

2.0 mm² Low Dark Current PIN Photodiode. Hermetically packaged in a TO-52-S1 with a clear borosilicate glass window cap.

APPLICATIONS


- Precision photometry
- Bar code readers
- Medical equipment
- Pulsed light sensor




ABSOLUTE MAXIMUM RATING

SYMBOL	PARAMETER	MIN	MAX	UNITS
T _{STG}	Storage Temp	-55	+125	°C
T _{OP}	Operating Temp	-40	+100	°C
V _{R(OP)}	Reverse Operating Voltage	-	50	V
I _{F(PEAK)}	Peak DC Current	-	10	mA

SCHEMATIC

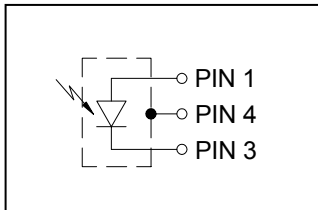

SPECTRAL RESPONSE

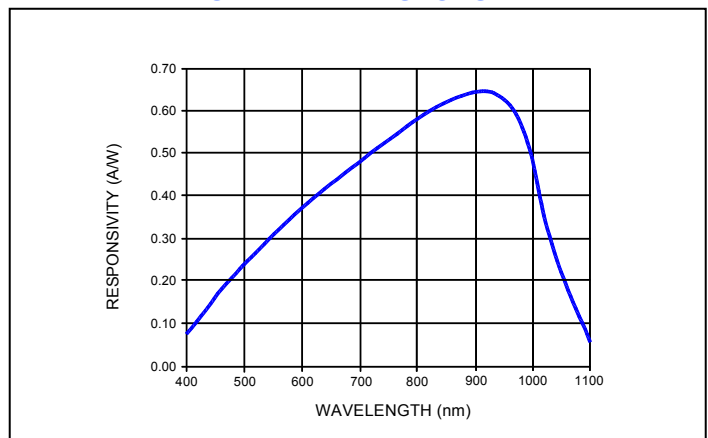

ELECTRO-OPTICAL CHARACTERISTICS @ 22° C

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
R _{SH}	Shunt Resistance	V _R = ±10 mV	1000	2000	---	MΩ
I _D	Dark Current	V _R = 10 V	---	0.1	---	nA
C	Capacitance	V _R = 0 V;	---	30	---	pF
		V _R = 10 V;	---	5.0	---	
	Responsivity	V _R = 0 V; λ = 633 nm	---	0.40	---	A/W
		V _R = 0 V; λ = 900 nm	---	0.64	---	
NEP	Noise Equivalent Power	V _R = 10 V; λ = 850 nm; R _L = 50 Ω	---	0.9 × 10 ⁻¹⁴	---	W/Hz ^{1/2}
V _{BR}	Breakdown Voltage	I _R = 10 μA	100	---	---	V
t _r	Rise Time	V _R = 10 V; λ = 850 nm; R _L = 50 Ω	---	12	---	ns
		V _R = 80 V; λ = 850 nm; R _L = 50 Ω	---	5	---	

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.

USA:

Pacific Silicon Sensor, Inc.
5700 Corsa Avenue, #105
Westlake Village, CA 91362 USA
Phone (818) 706-3400
Fax (818) 889-7053
Email: sales@pacific-sensor.com
www.pacific-sensor.com

International sales:

Silicon Sensor International AG
Peter-Behrens-Str. 15
D-12459 Berlin, Germany
Phone +49 (0)30-63 99 23 10
Fax +49 (0)30-63 99 23 33
Email: sales@silicon-sensor.de
www.silicon-sensor.de

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[PC2-6-TO52-S1](#)