

**Cornell Dubilier**

Cornell Dubilier Marketing, Inc  
Liberty, South Carolina  
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: DCMX692U075AB2B

Customer Part Number: None

Datasheet No.: 10233

Date: 07/08/08

Capacitance: 6900 $\mu$ F

Tolerance: - 10% + 75%

Working Volts: 75VDC

Surge Volts: 95VDC

Leakage Current @ 25°C: 4316 $\mu$ A

ESR @ 120 Hz @ 25°C: 0.037 $\Omega$  max.

Ripple Current @ 120 Hz, 85°C: 3.93A

Diameter (D): 1.375  $\pm$  0.031 inches

Length (L): 3.125  $\pm$  0.062 inches


Total Length, W/Insulation (TL): 3.390  $\pm$  0.062 inches

Terminal Spacing (S): 0.500  $\pm$  0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

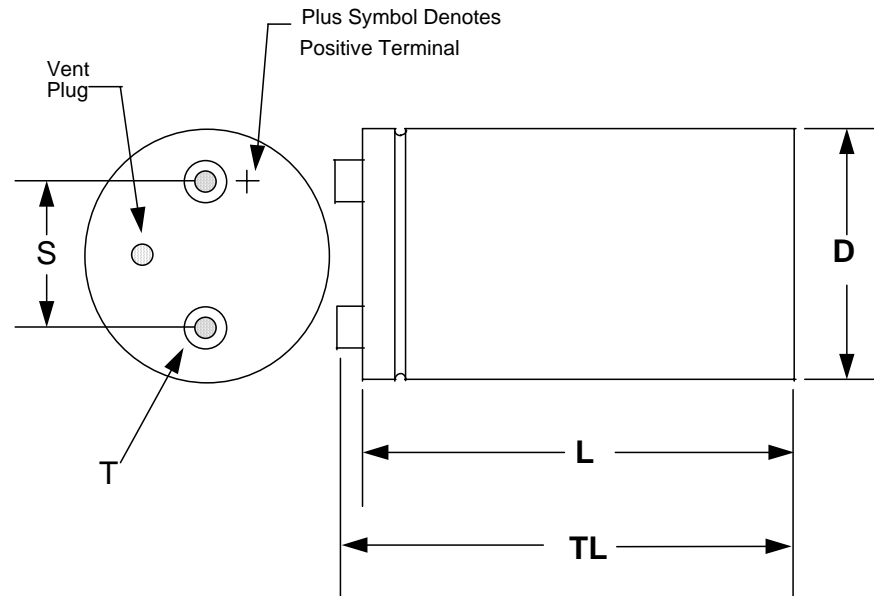

ROHS Compliant for all date codes after "0513",  
Per provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped  
in Red, Otherwise considered as an "Uncontrolled Copy"

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cornell Dubilier:](#)

[DCMX692U075AB2B](#)