

C3216X8R2A683K115AA

TDK Item Description : C3216X8R2A683KT****



Application & Main Feature

Commercial Grade (High Temperature Application)

Series

C3216 [EIA CC1206]



Dimensions

- L 3.20mm +/-0.2mm
- W 1.60mm +/-0.2mm
- T 1.15mm +/-0.15mm
- B 0.20mm Min.
- G 1.00mm Min.

Temperature Characteristic

X8R (-55 to 150 degC +/-15%)

Rated Voltage

2A (100Vdc)

Capacitance

68nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

3% Max.


Insulation Resistance

7.35Gohm Min.


AEC-Q200

Not Applicable


DC Bias Characteristic

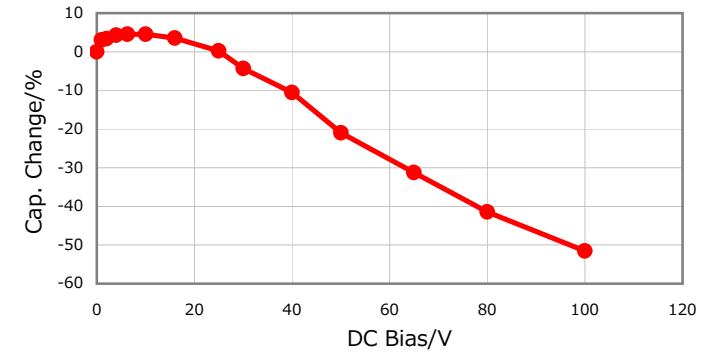


|Z|, ESR vs. Freq. Characteristics

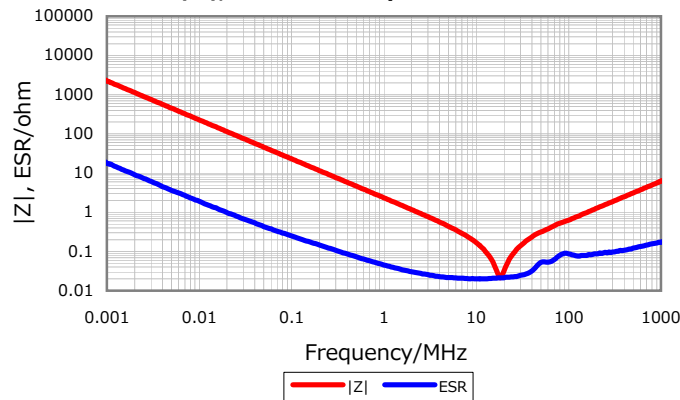


Temperature Characteristic

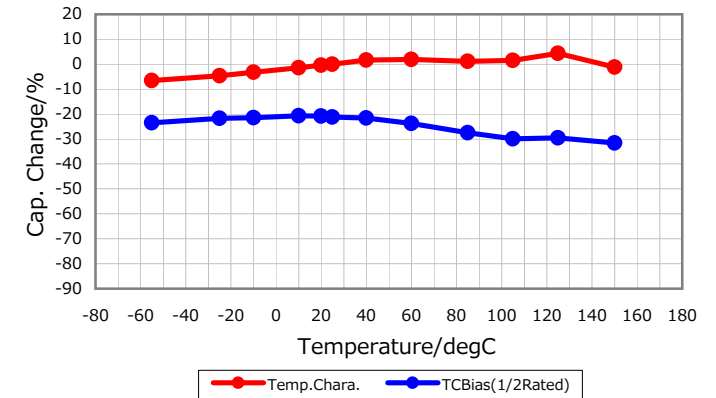

Cap. vs. Freq. Characteristic

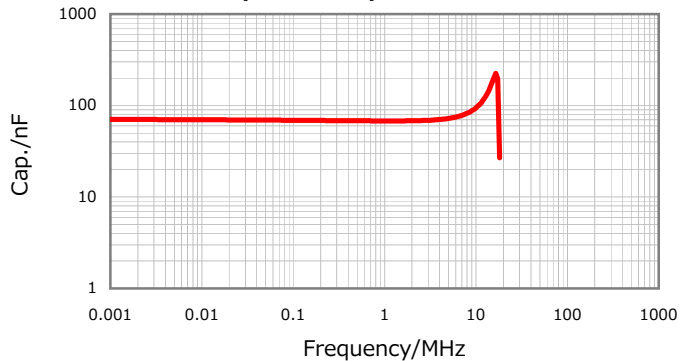

Ripple Temperature Rise Characteristic

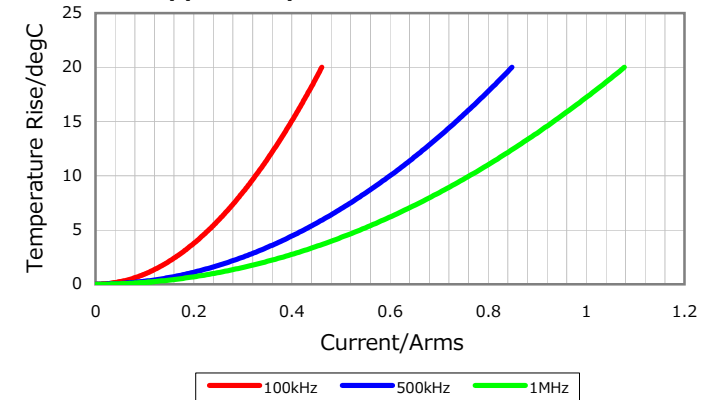

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

September 28, 2013

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK:](#)

[C3216X8R2A683K115AA](#)